
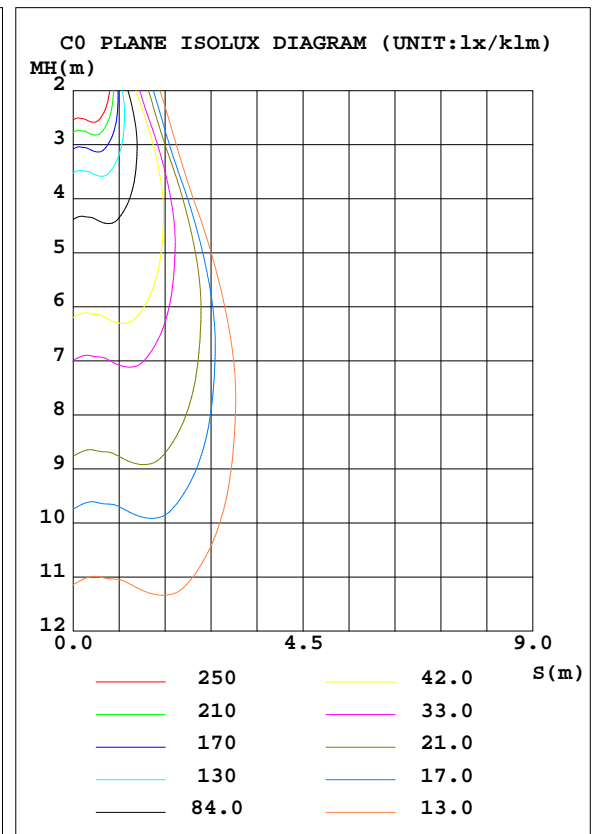


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.0V I:0.1120A P:12.80W PF:0.4438 Lamp Flux:1079.01x1 lm		
NAME: 12W 线	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:3.14*0.0009	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 84.30 lm/W			
MODEL		I _{max} (cd/klm)	1738	S/MH(C0/180)	0.58
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	0.70
RATED VOLTAGE(V)	230	TOTAL FLUX(lm/klm)	1000.0	η UP, DN(C0-180)	0.7,46.4
NOMINAL FLUX(lm)	1079.01	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.6,52.2
LAMPS INSIDE	1	η up(%)	1.3	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	230	η down(%)	98.7	CIBSE SHR MAX	0.65

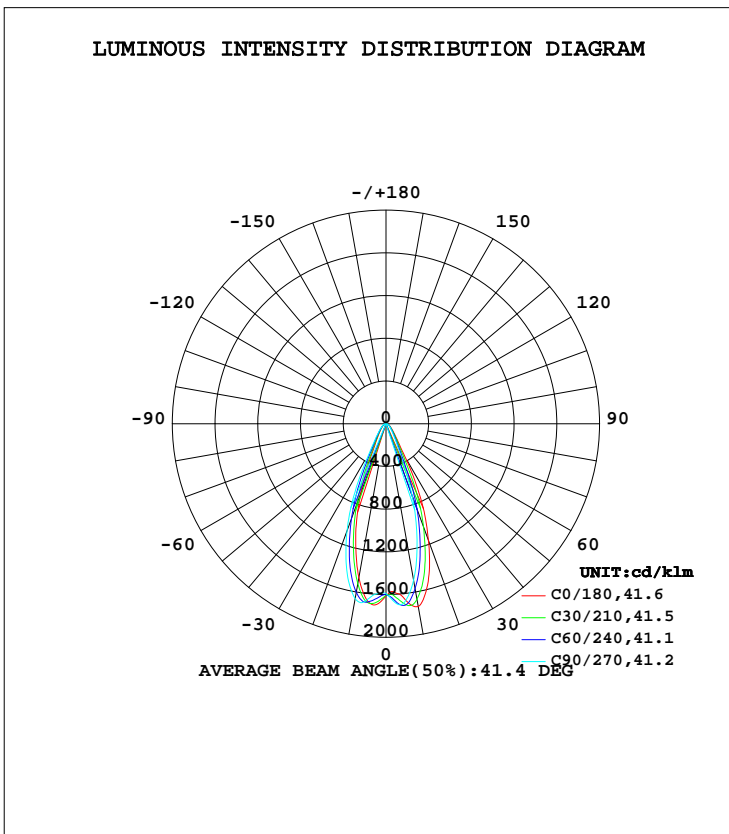

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Zhong ql
Test Date:08 September 2020

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.640m [K=1.0000]
Remarks:None

ZONAL FLUX DIAGRAM


ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	$\$lum, lamp$
5	1609	1690	1699	1666	1690	1678	1626	1562	0- 5	39.07	39.07	3.91,3.91
10	1738	1619	1488	1422	1464	1562	1664	1697	5- 10	116.7	155.8	15.6,15.6
15	1529	1320	1124	1044	1099	1252	1419	1520	10- 15	170.3	326.1	32.6,32.6
20	1163	937.8	716.5	626.2	689.4	872.7	1066	1174	15- 20	180.0	506.1	50.6,50.6
25	767.0	513.7	329.8	290.0	327.1	470.7	656.0	786.3	20- 25	146.9	652.9	65.3,65.3
30	355.4	240.2	183.1	166.9	179.4	227.7	304.8	379.0	25- 30	92.91	745.9	74.6,74.6
35	184.3	147.9	119.6	111.5	118.8	142.5	174.0	192.7	30- 35	56.39	802.3	80.2,80.2
40	120.2	100.9	84.51	80.36	84.99	97.86	114.2	123.9	35- 40	40.68	842.9	84.3,84.3
45	85.22	73.46	63.37	61.03	64.18	71.65	81.48	87.22	40- 45	31.77	874.7	87.5,87.5
50	63.63	56.13	49.64	48.33	50.64	55.11	61.43	64.96	45- 50	25.89	900.6	90.1,90.1
55	49.84	44.59	39.94	39.02	40.82	43.71	48.20	50.68	50- 55	21.74	922.3	92.2,92.2
60	40.19	35.84	31.96	31.06	32.53	34.73	38.40	40.54	55- 60	18.45	940.8	94.1,94.1
65	32.28	28.26	24.69	23.63	24.86	26.89	30.24	32.20	60- 65	15.38	956.2	95.6,95.6
70	24.92	21.10	17.89	16.68	17.65	19.80	22.94	24.77	65- 70	12.25	968.4	96.8,96.8
75	17.94	14.45	11.40	10.19	11.06	13.52	16.37	17.95	70- 75	9.064	977.5	97.7,97.7
80	11.22	8.118	5.387	4.305	5.021	7.444	10.20	11.53	75- 80	5.848	983.3	98.3,98.3
85	5.064	2.187	0.4259	0.1268	0.2872	1.898	2.519	5.562	80- 85	2.687	986.0	98.6,98.6
90	0.3007	0.0675	0.0913	0.0877	0.0813	0.0523	0.2842	0.5353	85- 90	0.5282	986.6	98.7,98.7
95	0.0741	0.1029	0.1488	0.1498	0.1451	0.1001	0.1792	0.0691	90- 95	0.0599	986.6	98.7,98.7
100	0.1407	0.1669	0.2194	0.2160	0.2193	0.1621	0.1540	0.1146	95-100	0.0772	986.7	98.7,98.7
105	0.1988	0.2494	0.3038	0.3018	0.3107	0.2479	0.2021	0.1904	100-105	0.1113	986.8	98.7,98.7
110	0.2862	0.3354	0.4022	0.4083	0.4187	0.3471	0.2796	0.2729	105-110	0.1538	987.0	98.7,98.7
115	0.3844	0.4530	0.5331	0.5411	0.5508	0.4584	0.3907	0.3811	110-115	0.2017	987.2	98.7,98.7
120	0.5186	0.6002	0.7094	0.7398	0.7421	0.6104	0.5223	0.5025	115-120	0.2592	987.4	98.7,98.7
125	0.7036	0.8325	1.010	1.096	1.082	0.8607	0.7033	0.6701	120-125	0.3371	987.8	98.8,98.8
130	1.025	1.262	1.574	1.757	1.713	1.327	1.033	0.9581	125-130	0.4673	988.2	98.8,98.8
135	1.615	2.018	2.519	2.824	2.678	2.108	1.649	1.501	130-135	0.6813	988.9	98.9,98.9
140	2.602	3.193	3.879	4.265	3.953	3.214	2.591	2.370	135-140	0.9810	989.9	99.99
145	3.975	4.686	5.487	5.883	5.431	4.585	3.848	3.556	140-145	1.315	991.2	99.1,99.1
150	5.566	6.319	7.136	7.478	6.914	6.061	5.313	4.990	145-150	1.599	992.8	99.3,99.3
155	7.168	7.878	8.630	8.846	8.227	7.444	6.761	6.459	150-155	1.756	994.5	99.5,99.5
160	8.571	9.159	9.786	9.817	9.184	8.570	8.075	7.818	155-160	1.735	996.3	99.6,99.6
165	9.651	10.05	10.48	10.40	9.791	9.311	9.081	8.909	160-165	1.531	997.8	99.8,99.8
170	10.39	10.61	10.75	10.74	10.33	9.826	9.633	9.664	165-170	1.182	999.0	99.9,99.9
175	10.88	10.92	10.80	10.83	10.80	10.40	10.12	10.30	170-175	0.7449	999.7	100,100
180	11.10	10.91	10.70	10.78	11.11	10.90	10.66	10.77	175-180	0.2564	1000	100,100
DEG	LUMINOUS INTENSITY:cd/klm								UNIT:lm/klm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Zhong ql
Test Date:08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:7.640m [K=1.0000]
Remarks:None

LUMINANCE LIMITATION CURVES

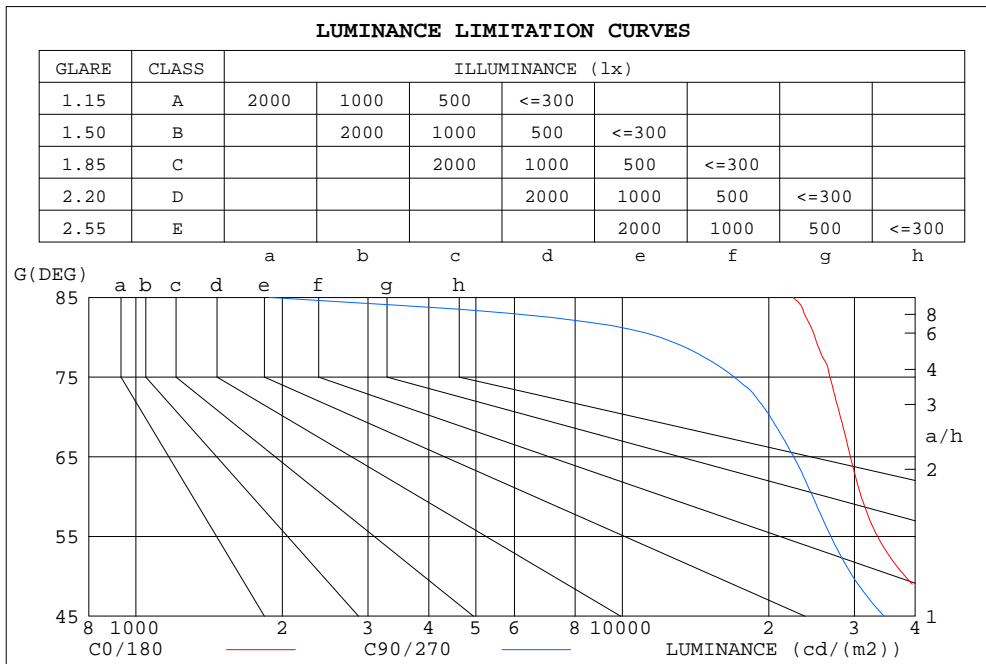


LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	22393	1883
80	24898	11955
75	26712	16973
70	28074	20154
65	29434	22509
60	30972	24635
55	33484	26832
50	38149	29761
45	46442	34536

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Zhong ql
 Test Date: 08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.640m [K=1.0000]
 Remarks: None

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.03	1.01	.90	.99	.98	.96	.96	.95	.93	.92
2.0	1.02	.98	.94	1.00	.96	.93	.97	.94	.91	.93	.91	.89	.91	.88	.87	.85
3.0	.95	.90	.86	.94	.89	.85	.91	.87	.84	.88	.85	.82	.86	.83	.81	.79
4.0	.89	.84	.79	.88	.83	.79	.86	.81	.78	.83	.80	.77	.81	.78	.76	.74
5.0	.84	.78	.74	.83	.77	.73	.81	.76	.73	.79	.75	.72	.77	.74	.71	.70
6.0	.79	.73	.69	.78	.73	.69	.77	.72	.68	.75	.71	.68	.74	.70	.67	.66
7.0	.75	.69	.65	.74	.69	.65	.73	.68	.64	.72	.67	.64	.70	.67	.64	.62
8.0	.71	.66	.62	.71	.65	.61	.70	.65	.61	.68	.64	.61	.67	.63	.60	.59
9.0	.68	.62	.59	.67	.62	.58	.66	.62	.58	.65	.61	.58	.65	.61	.58	.56
10.0	.65	.59	.56	.64	.59	.56	.64	.59	.55	.63	.58	.55	.62	.58	.55	.54

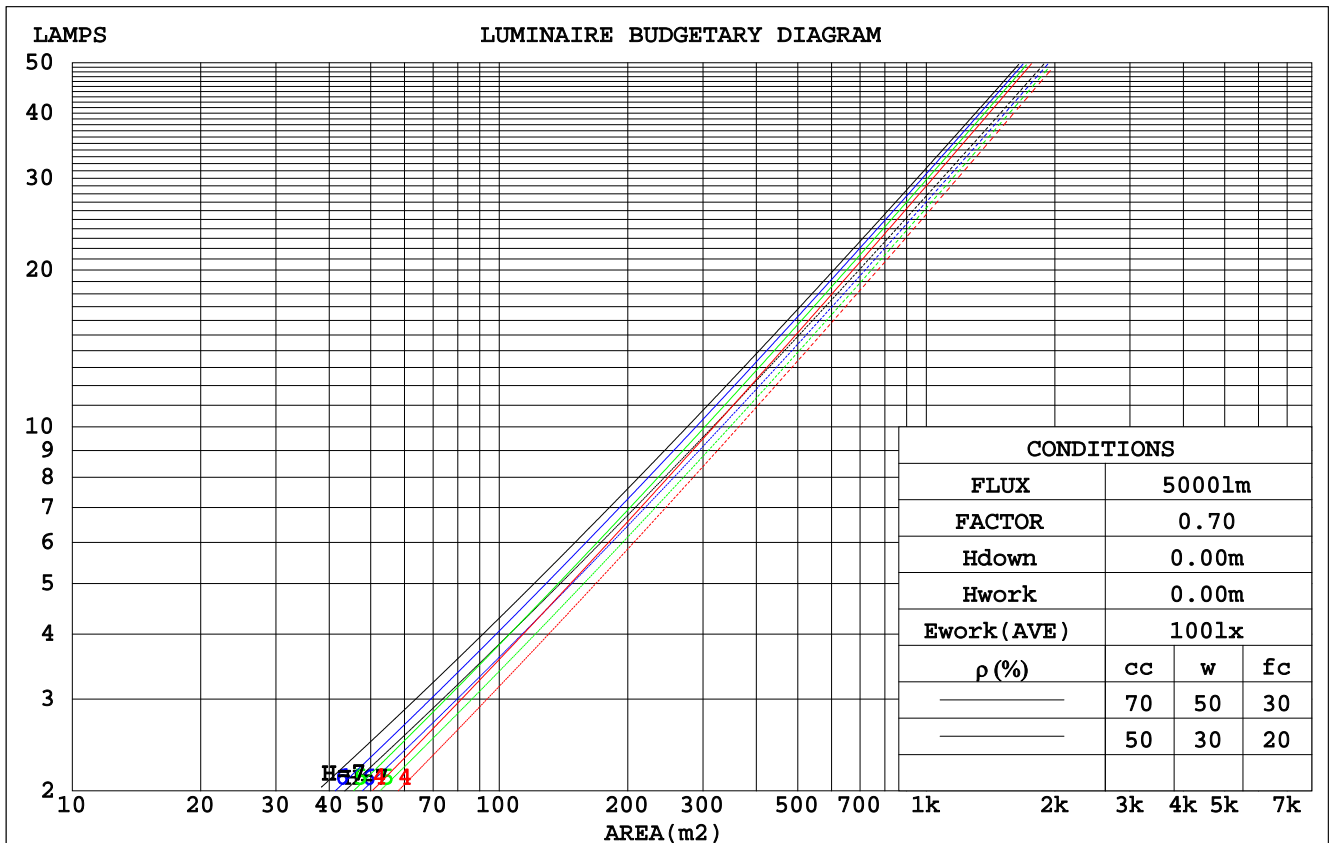

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Zhong ql
 Test Date: 08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.640m [K=1.0000]
 Remarks: None

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.189	.107	.034	.181	.103	.033	.168	.096	.031	.156	.090	.029	.144	.084	.027	
2.0	.178	.098	.030	.172	.095	.029	.161	.089	.028	.150	.084	.026	.140	.079	.025	
3.0	.167	.089	.027	.162	.087	.026	.152	.082	.025	.143	.078	.024	.135	.075	.023	
4.0	.157	.081	.024	.152	.080	.024	.144	.076	.023	.136	.073	.022	.129	.070	.021	
5.0	.147	.075	.022	.144	.074	.021	.136	.071	.021	.129	.068	.020	.123	.066	.020	
6.0	.139	.070	.020	.136	.069	.020	.129	.066	.019	.123	.064	.019	.118	.062	.018	
7.0	.132	.065	.018	.129	.064	.018	.123	.062	.018	.118	.060	.018	.113	.058	.017	
8.0	.125	.061	.017	.122	.060	.017	.117	.059	.017	.112	.057	.016	.108	.055	.016	
9.0	.119	.058	.016	.117	.057	.016	.112	.055	.016	.108	.054	.015	.104	.053	.015	
10.0	.114	.054	.015	.111	.054	.015	.107	.053	.015	.103	.051	.015	.100	.050	.014	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.201	.201	.201	.172	.172	.172	.117	.117	.117	.067	.067	.067	.022	.022	.022	
1.0	.182	.168	.154	.156	.144	.133	.107	.099	.092	.061	.057	.053	.020	.018	.017	
2.0	.167	.143	.122	.143	.123	.106	.098	.085	.074	.057	.049	.043	.018	.016	.014	
3.0	.155	.124	.099	.133	.107	.086	.091	.074	.060	.053	.043	.036	.017	.014	.012	
4.0	.145	.109	.083	.124	.095	.072	.085	.066	.051	.049	.039	.030	.016	.013	.010	
5.0	.136	.098	.070	.116	.085	.061	.080	.059	.043	.046	.035	.026	.015	.011	.008	
6.0	.128	.088	.060	.110	.077	.053	.076	.054	.037	.044	.032	.022	.014	.010	.007	
7.0	.121	.081	.053	.104	.070	.046	.072	.049	.033	.042	.029	.019	.013	.009	.006	
8.0	.115	.075	.047	.099	.065	.041	.068	.045	.029	.040	.027	.017	.013	.009	.006	
9.0	.109	.069	.042	.094	.060	.037	.065	.042	.026	.038	.025	.016	.012	.008	.005	
10.0	.104	.065	.038	.090	.056	.034	.062	.040	.024	.036	.023	.014	.012	.008	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Zhong ql
 Test Date: 08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.640m [K=1.0000]
 Remarks: None

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.1	22.0	21.3	22.2	22.4	19.8	20.7	20.1	20.9	21.1
3H	22.2	23.0	22.5	23.3	23.5	20.8	21.7	21.1	21.9	22.1
4H	22.7	23.5	23.0	23.7	24.0	21.2	22.0	21.5	22.2	22.5
6H	23.1	23.8	23.4	24.1	24.4	21.3	22.1	21.7	22.4	22.6
8H	23.2	24.0	23.5	24.2	24.5	21.3	22.1	21.7	22.4	22.7
12H	23.3	24.0	23.7	24.3	24.6	21.3	22.0	21.6	22.3	22.6
4H 2H	21.4	22.2	21.7	22.4	22.7	20.3	21.2	20.6	21.4	21.7
3H	22.7	23.4	23.0	23.7	24.0	21.5	22.2	21.9	22.5	22.8
4H	23.3	24.0	23.7	24.3	24.6	22.0	22.6	22.4	23.0	23.3
6H	23.8	24.4	24.2	24.8	25.1	22.2	22.8	22.6	23.2	23.5
8H	24.0	24.6	24.4	24.9	25.3	22.3	22.8	22.7	23.2	23.6
12H	24.2	24.6	24.6	25.0	25.5	22.2	22.7	22.7	23.1	23.5
8H 4H	23.4	24.0	23.8	24.3	24.7	22.2	22.8	22.6	23.1	23.5
6H	24.1	24.5	24.5	24.9	25.4	22.6	23.0	23.0	23.4	23.9
8H	24.3	24.7	24.8	25.1	25.6	22.6	23.0	23.1	23.5	23.9
12H	24.5	24.8	25.0	25.3	25.8	22.6	22.9	23.1	23.4	23.9
12H 4H	23.4	23.9	23.8	24.3	24.7	22.2	22.7	22.7	23.1	23.5
6H	24.1	24.4	24.5	24.9	25.4	22.6	23.0	23.1	23.4	23.9
8H	24.3	24.7	24.8	25.1	25.6	22.7	23.0	23.2	23.5	24.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.5				
1.5H	+ 0.7 / - 0.3					+ 0.3 / - 0.4				
2.0H	+ 0.6 / - 0.4					+ 0.4 / - 0.6				

CIE Pub.117 Corrected 1000 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.0)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Zhong ql
 Test Date:08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.640m [K=1.0000]
 Remarks:None


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	82	75	70	81	74	70	80	74	70	66
0.80	90	83	78	89	82	78	87	82	78	74
1.00	95	88	84	94	88	84	92	88	83	78
1.25	99	93	89	98	92	89	96	91	88	83
1.50	102	97	93	101	96	92	98	94	91	86
2.00	106	101	97	104	100	96	101	97	95	89
2.50	108	103	100	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	114	111	109	111	109	107	107	105	104	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Zhong ql
 Test Date:08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.640m [K=1.0000]
 Remarks:None


ISOCANDELA DIAGRAM

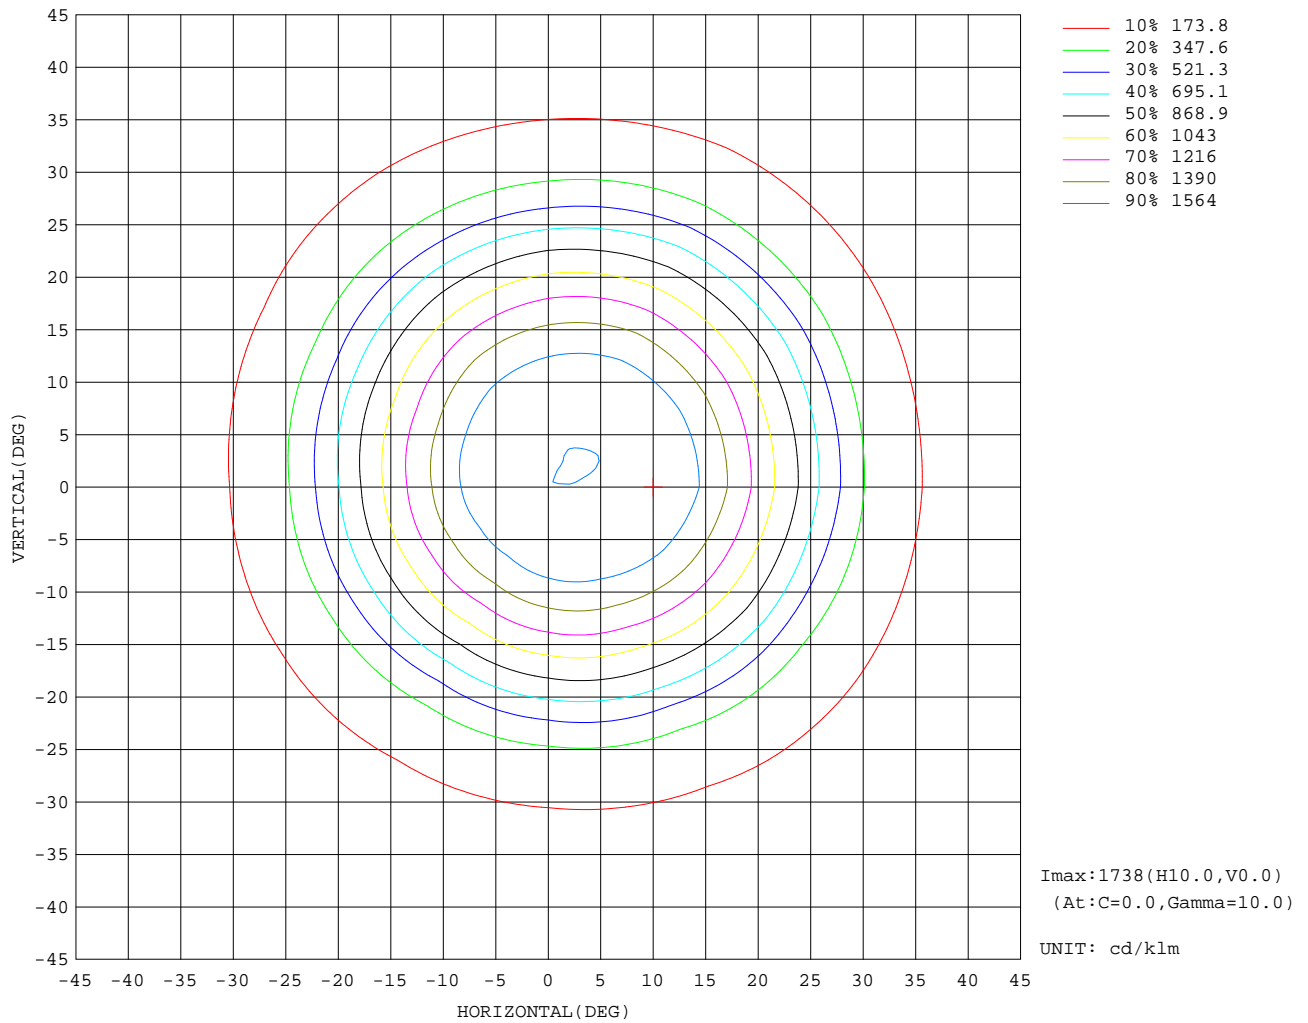

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Zhong ql
 Test Date:08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.640m [K=1.0000]
 Remarks:None

AAI Figure

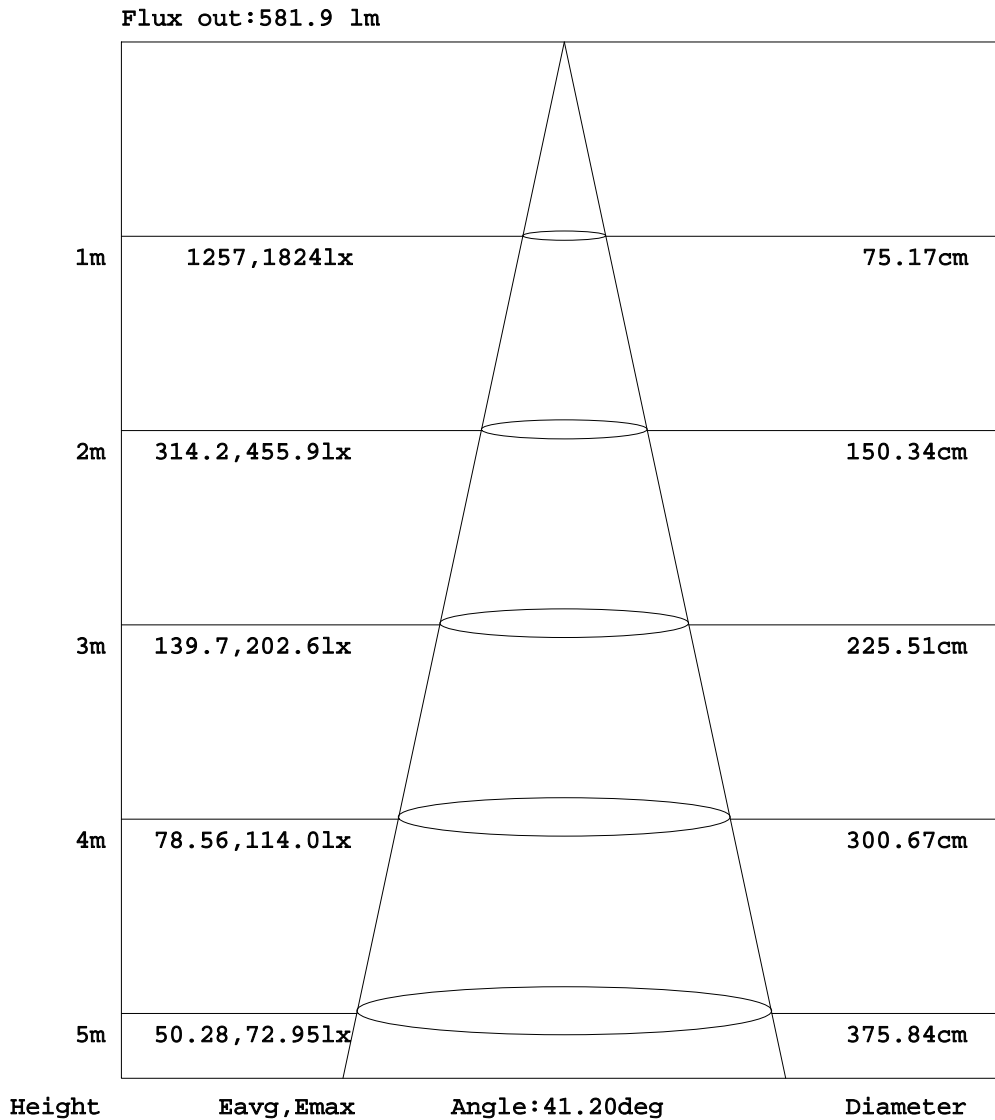


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Zhong ql
 Test Date: 08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.640m [K=1.0000]
 Remarks: None

ISOLUX DIAGRAM

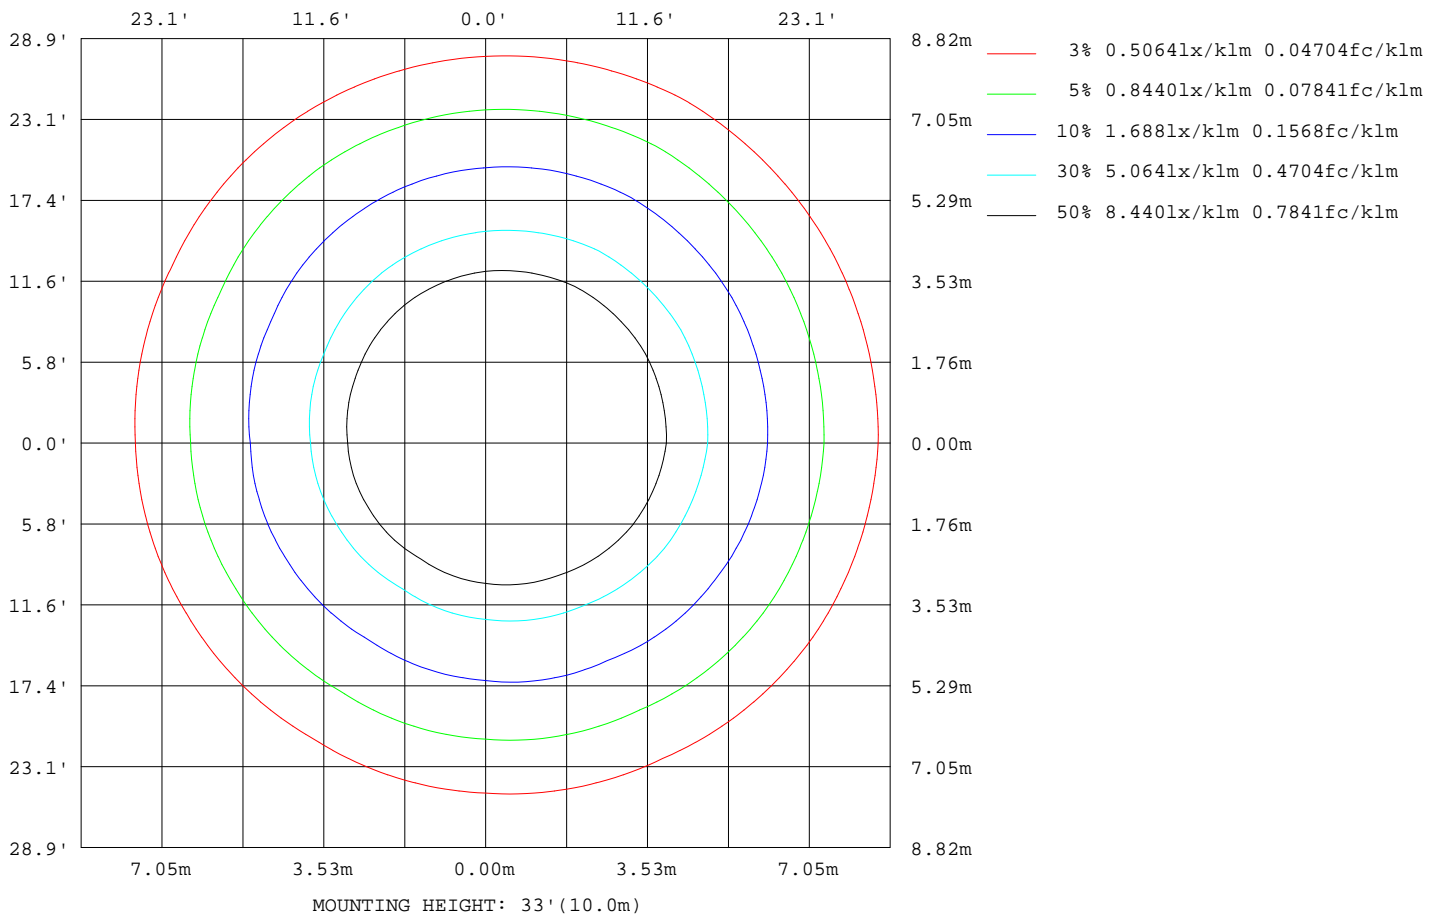

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Zhong ql
 Test Date: 08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.640m [K=1.0000]
 Remarks: None

LED Avg.L Report

Test:U:230.0V I:0.1120A P:12.80W PF:0.4438 Lamp Flux:1079.01x1 lm		
NAME: 12W 线	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:3.14*0.0009	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	26051
L_0~180(75)av	21591
L_0~180(85)av	11831
L_90~270(65)av	25043
L_90~270(75)av	20675
L_90~270(85)av	6512
L_45(65)av	25269
L_45(75)av	20857
L_45(85)av	11008

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Zhong ql
 Test Date:08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.640m [K=1.0000]
 Remarks:None

Planar Illuminance Curve

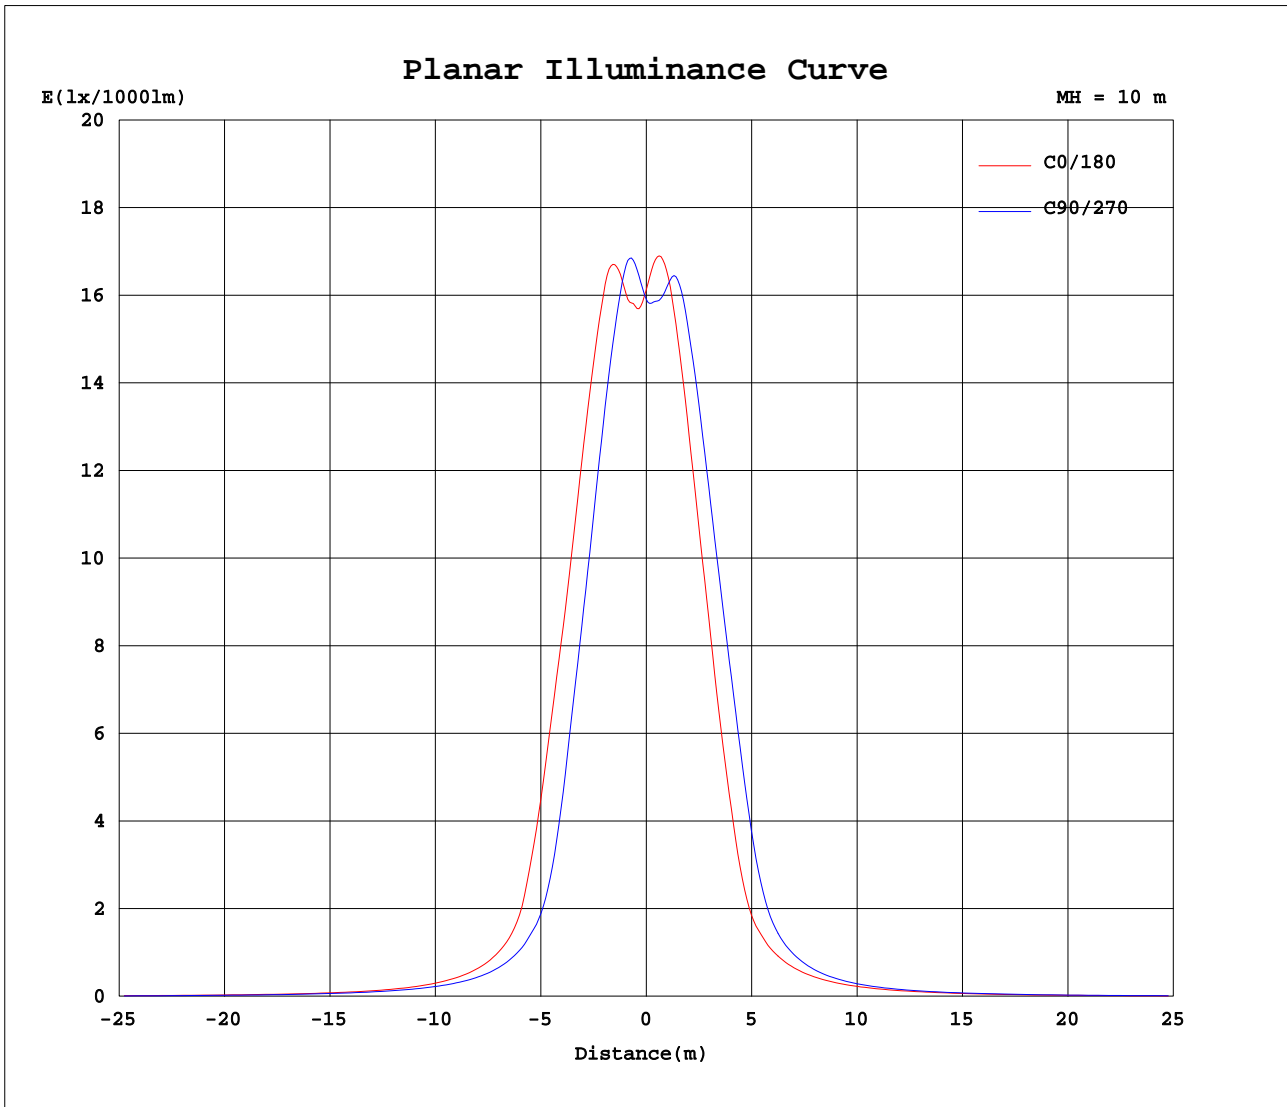

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Zhong ql
 Test Date: 08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.640m [K=1.0000]
 Remarks: None

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd/klm

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1613	1608	1600	1591	1585	1573	1613	1608	1600	1591	1585	1573							
5	1609	1673	1707	1699	1669	1662	1690	1690	1667	1626	1576	1549							
10	1738	1669	1569	1488	1422	1423	1464	1521	1603	1664	1691	1703							
15	1529	1403	1238	1124	1039	1049	1099	1182	1322	1419	1505	1535							
20	1163	1026	850	716	617	635	689	797	948	1066	1159	1190							
25	767	610	418	330	286	294	327	407	535	656	771	801							
30	355	269	211	183	166	168	179	204	252	305	372	386							
35	184	161	134	120	110	113	119	131	154	174	194	191							
40	120	109	93.3	84.5	79.7	81.0	85.0	91.7	104	114	125	123							
45	85.2	78.1	68.8	63.4	60.5	61.6	64.2	68.0	75.3	81.5	87.6	86.8							
50	63.6	59.1	53.1	49.6	47.9	48.8	50.6	52.9	57.3	61.4	65.4	64.5							
55	49.8	46.7	42.4	39.9	38.6	39.4	40.8	42.2	45.2	48.2	51.0	50.4							
60	40.2	37.6	34.1	32.0	30.7	31.4	32.5	33.5	35.9	38.4	40.6	40.5							
65	32.3	29.8	26.7	24.7	23.4	23.9	24.9	25.8	28.0	30.2	32.1	32.3							
70	24.9	22.5	19.7	17.9	16.5	16.8	17.7	18.8	20.8	22.9	24.6	25.0							
75	17.9	15.7	13.2	11.4	10.1	10.3	11.1	12.5	14.5	16.4	17.8	18.1							
80	11.2	9.27	6.97	5.39	4.20	4.41	5.02	6.41	8.48	10.2	11.5	11.5							
85	5.06	3.18	1.19	0.43	0.12	0.13	0.29	0.99	2.81	2.52	5.52	5.60							
90	0.30	0.07	0.07	0.09	0.07	0.10	0.08	0.05	0.05	0.28	0.54	0.53							
95	0.07	0.11	0.09	0.15	0.13	0.17	0.15	0.10	0.10	0.18	0.09	0.05							
100	0.14	0.17	0.16	0.22	0.20	0.24	0.22	0.16	0.16	0.15	0.13	0.10							
105	0.20	0.25	0.25	0.30	0.28	0.32	0.31	0.25	0.24	0.20	0.21	0.17							
110	0.29	0.33	0.34	0.40	0.39	0.43	0.42	0.36	0.34	0.28	0.29	0.26							
115	0.38	0.44	0.46	0.53	0.52	0.56	0.55	0.47	0.45	0.39	0.40	0.36							
120	0.52	0.58	0.62	0.71	0.73	0.75	0.74	0.63	0.59	0.52	0.52	0.49							
125	0.70	0.79	0.88	1.01	1.08	1.11	1.08	0.92	0.81	0.70	0.68	0.66							
130	1.03	1.16	1.36	1.57	1.74	1.77	1.71	1.45	1.20	1.03	0.96	0.95							
135	1.62	1.84	2.20	2.52	2.82	2.83	2.68	2.32	1.90	1.65	1.49	1.51							
140	2.60	2.92	3.47	3.88	4.28	4.25	3.95	3.49	2.93	2.59	2.35	2.39							
145	3.97	4.37	5.01	5.49	5.89	5.87	5.43	4.91	4.26	3.85	3.53	3.58							
150	5.57	5.99	6.65	7.14	7.50	7.46	6.91	6.38	5.74	5.31	4.97	5.01							
155	7.17	7.56	8.20	8.63	8.89	8.81	8.23	7.73	7.15	6.76	6.45	6.47							
160	8.57	8.90	9.42	9.79	9.86	9.77	9.18	8.76	8.38	8.08	7.83	7.81							
165	9.65	9.88	10.2	10.5	10.4	10.4	9.79	9.42	9.20	9.08	8.92	8.90							
170	10.4	10.5	10.7	10.8	10.7	10.8	10.3	9.96	9.69	9.63	9.66	9.67							
175	10.9	10.9	10.9	10.8	10.8	10.9	10.8	10.6	10.2	10.1	10.3	10.3							
180	11.1	11.0	10.8	10.7	10.8	10.8	11.1	11.0	10.8	10.7	10.8	10.8							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Zhong ql
 Test Date: 08 September 2020

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.640m [K=1.0000]
 Remarks: None